

R70VT Line Matching Transformer

70 Volt to 8 Ohm Line Matching Transformer


The Current Audio R70VT adapts our 8 Ohm speakers for use with multi-speaker 70-volt commercial distributed public address and sound systems. It features a high power, low insertion loss, wide frequency response quality line matching design.

The transformer has multiple primary taps of 30-15-8-4 watts with the secondary at 8 Ohms.

The transformer is constructed of audio caliber laminations. It has a very low insertion loss and has a frequency response of 40-16kHz.

The unit has two mounting holes for easy attachment to locations on the speaker or any hard surface.

With our limited Lifetime warranty you are assured years of superior trouble free operation.

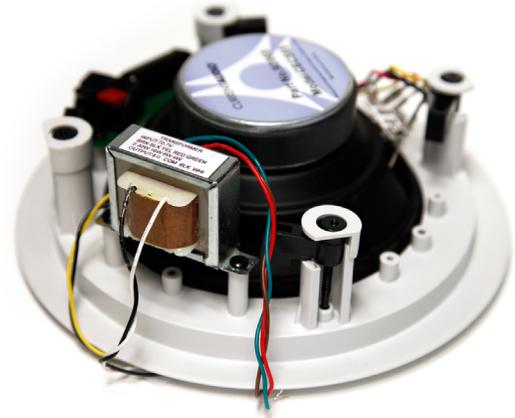

Part Number	92070
Manual URL	www.currentaudio.com
Accessories	Any 8 Ohm Speaker

WIRE COLOR CODING

Brown	70 Volt Line Common
Black	30 Watt Tap
Yellow	16 Watt Tap
Red	8 Watt Tap
Green	4 Watt Tap
Black	8 Ohm Side Common (-)
White	8 Ohm Side Plus (+)

