



## Universal Bracket | SKU: AE-UB-W (white), AE-UB-B (black)

For mounting the emitter to a wall or ceiling. Rotates in 45-degree increments for optimal sound dispersion. Ships with screws and screw anchors. Compatible with both Qt Active Emitter and Qt Standard Emitter.

### DIMENSIONS:

<b>Cylinder length:</b> 4" (10.16 cm)	<b>Bracket height:</b> 3.625" (9.21 cm)
<b>Cylinder diameter:</b> 3.5" (8.89 cm)	<b>Bracket length:</b> 2.5" (6.1 cm)
<b>Bracket width:</b> 3.75" (9.53 cm)	<b>Weight:</b> 3.9 oz. (110.56 g)



## Beam Bracket | SKU: AE-BB-W (white), AE-BB-B (black)

For mounting the emitter to exposed I-beams or trusses. Ships with bolt for attaching clamp to cylinder and for attaching clamp to beams. Compatible with both Qt Active Emitter and Qt Standard Emitter.

### DIMENSIONS:

<b>Cylinder length:</b> 4" (10.16 cm)	<b>Clamp width:</b> .94" (2.39 cm)
<b>Cylinder diameter:</b> 3.5" (8.89 cm)	<b>Clamp height:</b> 1.5" (3.81 cm)
<b>Clamp opening:</b> .95" (2.4 cm)	<b>Clamp length:</b> 1.75" (4.45 cm)
	<b>Weight:</b> 4.2 oz. (119.07 g)



## Pendant Mount | SKU: PM-W (white), PM-B (black)

Offers a simple and attractive way to install Qt Active or Standard Emitters in an open or raised ceiling space and suspends them at the optimum height for best coverage. Includes pendant mount top and cylinder, cable, and cable box cover assembly.

### DIMENSIONS:

<b>Height:</b> 7" (17.8cm)	<b>Mounts to:</b> 4" octagonal electrical ceiling box
<b>Diameter:</b> 3.3" (8.4cm)	<b>Cable:</b> 4 wire UTP, 24 AWG
<b>Hanging Weight:</b> 12 oz. (340g)	




## Drywall Mount | SKU: DM

For mounting the emitter into drywall ceilings. Compatible with both Qt Active Emitter and Qt Standard Emitter.

### DIMENSIONS:

<b>Cylinder length:</b> 2.1" (5.4 cm)	<b>Max. drywall depth:</b> 0.75" (1.9 cm)
<b>Cylinder diameter:</b> 3.5" (8.9 cm)	<b>Material:</b> PC/ABS
<b>Weight:</b> 1.2 oz. (34 g)	<b>Color:</b> White

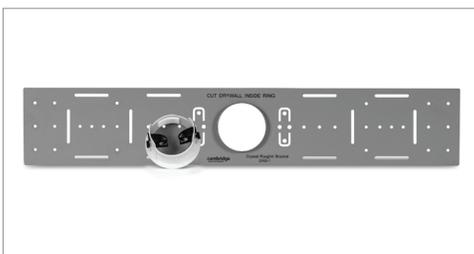

## Drywall Roughin Bracket | SKU: DRB-1

For installing with holes left for cables and Qt® Emitters before the drywall ceiling is hung. Slats make the bracket easier to fold and fit into joists and holes are included to help nail or screw it in place. Tabs fold up to hold emitter in place. Specify DRB-1 Kit to get the Drywall Roughin Bracket with the Drywall Mount (DM).

### DIMENSIONS:

<b>Height:</b> .375" (.953 cm)	<b>Width:</b> 5" (12.7 cm)
<b>Length:</b> 28" (71.12 cm)	<b>Weight:</b> 1.41 lb. (639.57 g)



## Plenum Back Can | SKU: PB

For mounting the emitter into acoustic ceiling tile in regions with special fire and/or conduit requirements. Only compatible with Qt Standard Emitter.

### DIMENSIONS:

<b>Cylinder length:</b> 4.5" (11.4 cm)	<b>Conduit hole diameter:</b> 0.75" (1.9 cm)
<b>Cylinder diameter:</b> 2.7" (6.9 cm)	<b>Max tile depth:</b> 1.5" (3.8 cm)
<b>Weight:</b> 2.8 oz (79 g)	<b>Material:</b> Aluminum
	<b>Color:</b> Silver