
RFB4 Series Multiservice Shallow Steel Recessed Floor Box Ordering Information

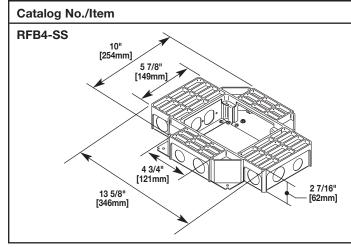


Description/Specifications

Four-Compartment Shallow Stamped Steel Box – 13 5/8" L x 10" W x 2 7/16" D [346mm x 254mm x 62mm]. Fully adjustable with tunnel compartment and two receptacle brackets. Feed through tunneling to adjacent compartments

only. Tunneling can be set to feed all four compartments from one conduit in a single-service application. Communication brackets not included. See "Accessories".

NOTE: Only for use in concrete floors. All boxes and activations are sold separately.

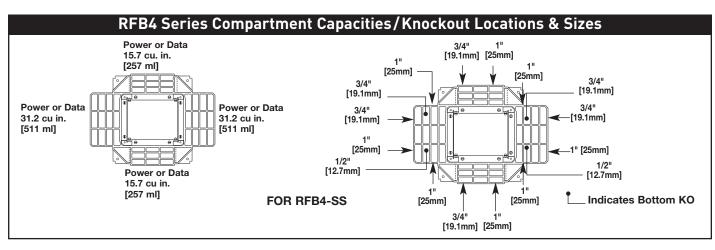

Catalog No./Item	Description/Specifications	Catalog No./Item	Description/Specifications
RFB-B-SS	Internal Blank Bracket – Used to close off unused Gangs.	RFB-2-SSRT	Communication Bracket – Ortronics [®] AB2TJ TracJack and ABS2 Series II adapters included
RFB-RB-SS	Internal Duplex Receptacle Bracket – Accepts standard 15 Amp & 20 Amp Duplex Receptacles.	Four R knockc or for u	Internal Bracket – Four RJ Keystone opening knockouts. Use as blank plate or for up to four RJ openings. NOTE: Opening dimension is 9/16
RFB-GFI-SS	Internal GFI Receptacle Bracket – Accepts standard GFCI & Decorator style Receptacles Communication or Audio/Video Devices.	RFB4-SS-AAP	x 3/4" [14.3mm x 19.1mm]. Internal Audio Video Bracket – Accepts two (2) Extron® Electron AAP Series Devices. (Sold separately) NOTE: For RFB4-SS Series
RFB-2AB-SS	Internal Bracket – Two Pass & Seymour® Activate adapters included. Wiremold CM Series Open System inserts sold separately.	RFB4-SS-MAAP	Floor Boxes only. Internal Audio Video Bracket – Accepts two Extron® Electronics MAAP Series Devices. (Sold separately)
Additional configurations a	available. Please consult your		NOTE: For RFB4-SS Series Floor Boxes only.