PLCM-UNL PLCM-UNL-CP(-AB/-AW)



SMARTMOUNT. Universal Ceiling Mount for 32" to 75" displays

Peerless-AV's PLCM flat panel ceiling mount products and components utilize a 1.5" NPT pipe for versatility, support and connection. The 1.5" NPT threaded pipe make it simple to customize each mount to your specific application. The PLCM-UNL kit combines the PLP-UNL universal adaptor plate, the PLCM-2 tilt box and a fixed length 1.5" NPT column to deliver a drop of 30" for display mounting patterns of up to 730 x 405mm. When combined with a Peerless-AV ceiling plate, it provides the perfect

combination for flat panel ceiling mounting for sports facilities, airports, lobbies or

PLCM-UNL's 360° of side-to-side swivel helps create the best viewing angle from anywhere in the room.

retail environments.



Additional Features

- O° to 20° adjustable tilt and 360° swivel
- ☑ Standard 1.5" NPT pipe included providing a 30" drop
- Ø Simple hook-on display installation
- ✓ Universal models fit displays with mounting holes up to 730 x 405mm (28.75"W x 15.95"H)
- Integrated cable management protects, contains and conceals cables for a clean, professional installation
- Agion[®] antimicrobial* finish assists in controlling the spread of infections with ST660-AB/AW models

*Antimicrobial protection is limited to the treated article and does not protect a user against disease causing bacteria. Always clean products thoroughly after each use. Visit agion-tech.com for more details.



PLCM-UNL Models Patented. Utility Patent No. 8,517,322;8,348,212.

PLCM-UNL-CP HEAVY GAUGE CONSTRUCTION MAXIMUM VIEWING POSSIBILITIES S6° of side-to-side swivel creates endless viewing possibilities from anywhere in the room Up to 20° of tilt helps set the perfect viewing angle HEAVY GAUGE CONSTRUCTION Made entirely from cold rolled steel, providing maximum strength and reliability

> **UNIVERSAL COMPATIBILITY** Fits displays from 32" to 75"



Model Numbers

PLCM-UNL/PLCM-UNL-CP(-AB)(-AW) SmartMount® Universal Ceiling Mount for 32" to 75" Displays

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS	
PLCM-UNL	30.75" x 42.56" x 4.33" (781 x 1081 x 110mm)	22.8lb (10.4kg)	2001b (90kg)	Powder Coat	PLCM-UNL:	Black
					PLCM-UNL-CP:	Black
PLCM-UNL-CP(-AB)(-AW)	30.75" x 43.54" x 4.54" (781 x 1106 x 115mm)	25.6lb (11.6kg)			PLCM-UNL-CP-AB:	Antimicrobial* black
					PLCM-UNL-CP-AW:	Antimicrobial* white


*Antimicrobial protection is limited to the treated article and does not protect a user against disease causing bacteria. Always clean products thoroughly after each use. Visit agion-tech.com for more details.

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE		PACKAGE CONTENTS	UNITS IN PACKAGE
PLCM-UNL PLCM-UNL-CP(-AB)(-AW)	38.50" x 12.25" x 8.50" (978 x 311 x 216mm) 38.50" x 12.25" x 8.50" (978 x 311 x 216mm)	29.6lb (13.5kg) 31.7lb (14.4kg)		735029280934	PLCM-UNL: Extension column, tilt box, universal display adaptor, mounting hardware & instructions PLCM-UNL-CP(-AB/-AW): Ceiling plate, extension column, tilt box, universal display adaptor, mounting hardware & instructions	1

Accessories

ACC, CMJ, DCS, DCT Models: Ceiling Plates

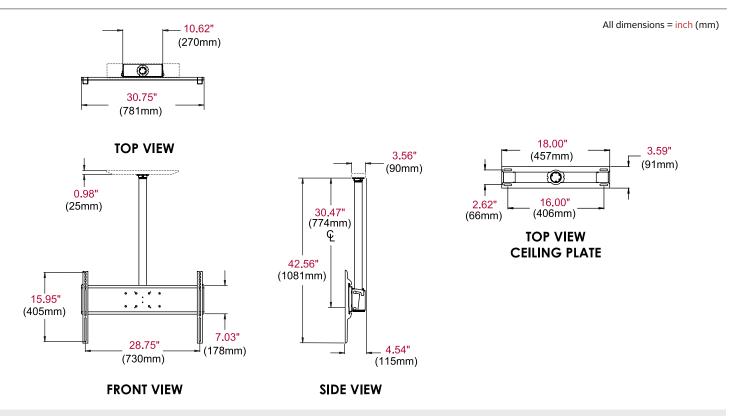

Architect Specifications

The Smartmount[®] Universal Ceiling Mount shall be a Peerless-AV model PLCM-UNL or PLCM-UNL-CP(-AB/-AW) and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit **peerless-av.com** to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories. Peerless-AV 2300 White Oak Circle Aurora, IL 60502 USA (800) 865-2112 (630) 375-5100 Peerless-AV Europe Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom +44 (0) 1923 200100 Fax: +44 (0) 1923 200101 Peerless-AV de México Ave de las Industrias 413 Parque Industrial Escobedo Escobedo, N.L., Mexico 66050 +52 (81) 8384-8300 Fax: +52 (81) 8384-8360

