


Specifications

USB PowerPlate 200 Series

General


Power supply (USB)	External Input: 100-240 VAC, 50-60 Hz Output: 12 VDC, 1.5 A, 18 watts
Power output (USB)	USB: 5 VDC Up to 2.4 A on a single port, 12 watts total Up to 3.0 A total shared, 15 watts total
Power consumption	
Device	17.1 watts
Device and power supply	19.5 watts
Power output (AC models)	125 VAC, 50-60 Hz, 12 A max.
Thermal dissipation (USB)	
Device	8.1 BTU/hr
Device and power supply	16.3 BTU/hr
Mounting	
Rack mount	
AAP/MAAP/AC AAP	Yes, with optional rack mounting frame
Furniture or wall mount	
AAP/MAAP/AC AAP	Yes, with optional AAP mounting frame
Enclosure type	Metal
AC power cord	
USB	Type A female
Enclosure dimensions	
AC AAP	
Connector type	NEMA 5-15 R, polarized, 3-pin to NEMA 5-15 P, non-polarized, 3-pin 2 USB Type A female, power only
Cable length	AC power cord 9' (2.7 meter)
Cable outer diameter	AC power cord 0.29" (7.4 mm)
Faceplate	1.38" H x 3.48" W (35 mm H x 89 mm W (double space AAP plate))
Device	1.30" H x 2.70" W (33 mm H x 69 mm W) Allow at least 2.77" (70 mm) depth in the furniture.

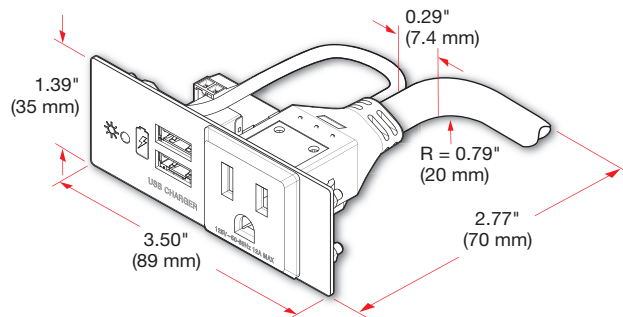

Specifications • USB PowerPlate 200 Series (Continued)


AAP

Connector type.....	2 USB Type A female, power only
Faceplate.....	0.68" H x 3.48" W (17 mm H x 88 mm W) (single space AAP plate)
Device	0.54" H x 2.03" W x 1.48" D (14 mm H x 52 mm W x 38 mm D) Depth excludes connectors. Allow at least 1.57" (40 mm) depth in the wall or furniture.

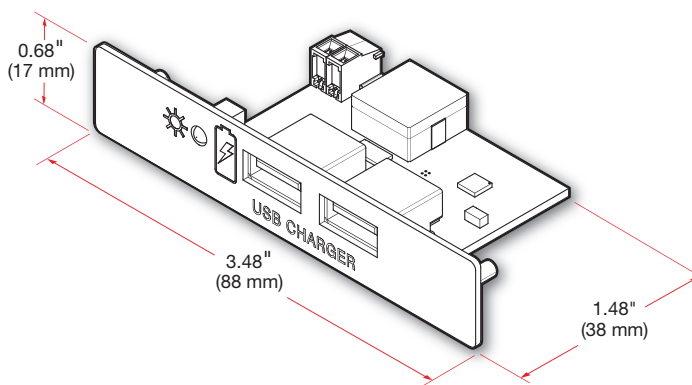

MAAP

Connector type.....	2 USB Type A female, power only
Faceplate.....	1.39" H x 2.16" W (35 mm H x 55 mm W) (double space MAAP plate)
Device	0.78" H x 1.40" W x 1.48" D (20 mm H x 36 mm W x 38 mm D) Depth excludes connectors. Allow at least 1.58" (40 mm) depth in the wall or furniture.

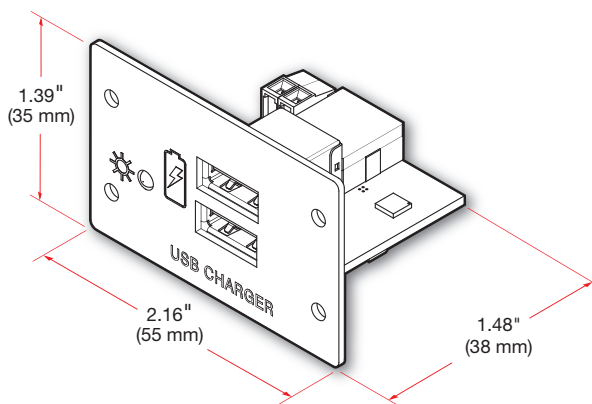

Product weight

AC AAP.....	1.2 lbs (0.5 kg)
AAP and MAAP	0.1 lbs (0.05 kg)
Regulatory compliance.....	CE, c-UL, UL, C-tick, FCC Class A, ICES, VCCI Class A, RoHS, WEEE
Product warranty	3 years parts and labor
Everlast power supply warranty.....	7 years parts and labor

NOTE: Specifications are subject to change without notice.

NOTE: Shipping weights and dimensions are available at www.extron.com.

5181-D7