




## WP-20

Conmutador / transmisor automático de placa de pared HDMI y VGA 4K60 4: 2: 0 sobre PoE de alcance extendido sobre HDBaseT con Automatización de sala Maestro

| VGA/UXGA - 15-pin HD | HDMI | Ethernet - RJ-45 | HDCP Compliant | HDBaseT | 4K/60 UHD (4:2:0)

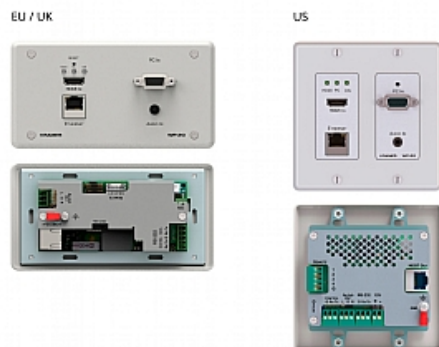

El WP 20 es un conmutador y transmisor de placa de pared multiformato 4K de alto rendimiento sobre HDBaseT de alcance extendido. Al ofrecer automatización inteligente Maestro, con opciones de conmutación de prioridad y última conexión, conmuta automáticamente y opera la habitación de acuerdo con el esquema de conmutación seleccionado basado en la detección de señal de video activa

## FEATURES

**Simple and Powerful Maestro Room Automation** - Intuitive user interface enables you to fully automate your meeting room elements. Configure lights, shades, devices and more to be activated by an extensive range of triggers, including input/output connectivity, routing, and button pressing. By minimizing user intervention, Maestro room automation saves meeting prep time and minimizes human error before presentations

**High Performance Switcher Transmitter** - Professional HDBaseT Switcher transmitter for providing extended-reach signals over twisted pair copper infrastructures. This switcher transmitter is a standard transmitter that can be connected to any market-available HDBaseT-compliant extension product

**BYOD Plug & Play Auto Switcher** - Automatically plays the switched user device source signal on the connected display according to user-configured preferences, such as priority or last-connected input. When the user manually switches, by pressing a button, the auto switching is overridden

**Simple Switching Operation** - Local buttons or remotely connected contact-closure buttons for flexible user input selection and switching control

**HDMI™ Signal Switching** - HDCP compliant, supporting deep color, x.v.Color™, lip sync, HDMI uncompressed audio channels, Dolby TrueHD, DTS-HD, 2K, 4K, and 3D as specified in HDMI 2.0

**I-EDIDPro™ Kramer Intelligent EDID Processing™** - Intelligent EDID handling, processing, locking and pass-through algorithm ensures plug & play operation for HDMI source and display systems

**Multi-channel Audio Switching** - Up to 32 channels of digital stereo uncompressed signals for supporting studio-grade surround sound

**Audio Embedding** - An auto-detected analog stereo audio input, per user selection, is converted into a digital signal and embedded in the output HDMI signal, replacing the source HDMI audio input signal. This enables, for example, a presenter to temporarily override the playing source audio with speech description

**Audio De-embedding** - The digital audio signal passing-through to the output, is de-embedded, converted to an analog signal and sent to the stereo analog audio output. This enables playing the audio on locally connected speakers, in parallel to playing it on the speakers connected to the AV acceptor device (such as TVs with speakers)

**Ethernet Extension** - Ethernet interface data flows in both directions, allowing extension of up to 100Mbps Ethernet connectivity for LAN communication and device control

**Bidirectional RS-232 Extension** - Serial interface data flows in both directions, allowing data transmission and device control

**Reliable PoE (Power over Ethernet) Powering** - Auto-senses the extension line PoE status, it accepts power from a remote PoE provider such as a PoE matrix, with optional mains powering from connected power adapter

**Cost-effective Maintenance** - Status LED indicators for HDMI, VGA and HDBT ports facilitate easy local maintenance and troubleshooting. Remote IP-driven device management via built-in web pages and RS-232 connection. Local and remote firmware upgrade via RS-232 or Ethernet connection tool ensure lasting, field-proven deployment

**Easy Installation** - Compactly fits into standard US, EU and UK 2-gang in-wall box size, supporting decorative integration with room deployed user interfaces such as electrical switches. Wall-plate installation is fast and cost-effective via a single twisted pair cable, providing both video signal and power (PoE) connections



## TECHNICAL SPECIFICATIONS

---

Inputs	1 HDMI: On HDMI connectors
	1 VGA: On a 15-pin HD (F) connector
	1 Unbalanced Stereo Audio 1V RMS (nominal): On a 3.5mm jack
Outputs	1 HDBaseT: On an RJ-45 connector
	1 Unbalanced Stereo Audio 1V RMS (nominal): On a 3.5mm jack
Ports	1 RS-232: On a 3-pin terminal block for serial link extension
	1 RS-232: On a 3-pin terminal block for device serial control
	1 100BaseT Ethernet: On an RJ-45 connector
	4 Contact-Closure Switches: On a 5-pin terminal block for remote device operation
Video	Max. Data Rate: 10.2Gbps (3.4Gbps per graphic channel)
	Max. Resolution: 4K@60Hz (4:2:0) 24bpp resolution
	HDMI Support: Deep color, x.v.Color™, lip sync, HDMI uncompressed audio channels, Dolby TrueHD, DTS HD, 2K, 4K, and 3D as specified in HDMI 2.0
	Compliance: HDCP 1.4
Extension Line	Up to 100m (330ft): At 4K@60Hz (4:2:0)
	Up to 130m (430ft): At full HD (1080p @60Hz 36bpp)
	Up to 180m (590ft): At HDBaseT ultra mode and full HD (1080p @60Hz 24bpp)
	Note: When using Kramer HDBaseT cables
	Compliance: HDBaseT 1.0
Audio	Max. Level: 3.1 Vpp
	THD: 0.013%
	SNR: -70dB
Extended Ethernet	Line rate bandwidth: Up to 100Mbps
Extended RS-232	Baud rate: 300 to 115200
Power	Source: 12V DC 2A, PoE
	Consumption: 850mA
Environmental Conditions	Operating Temperature: 0° to +40°C (32° to 104°F)
	Storage Temperature: -40° to +70°C (-40° to 158°F)
	Humidity: 10% to 90%, RHL non-condensing
Enclosure	Cooling: Convection
	Type: Aluminum
	Size: 2 Gang
NORMATIVA	Environmental: RoHs, WEEE, and CE

## REGULADORA

Accessories	Included: Power adapter
Product Dimensions	US: 12.10cm x 5.10cm x 12.10cm (4.76" x 2.01" x 4.76" ) W, D, H EU: 15.10cm x 4.00cm x 8.00cm (5.94" x 1.57" x 3.15" ) W, D, H UK: 15.10cm x 4.00cm x 8.60cm (5.94" x 1.57" x 3.39" ) W, D, H
Product Weight	US: 0.2kg (0.5lbs) approx EU: 0.3kg (0.6lbs) approx UK: 0.3kg (0.6lbs) approx
Shipping Dimensions	US: 23.20cm x 13.60cm x 10.00cm (9.13" x 5.35" x 3.94" ) W, D, H EU: 25.60cm x 11.80cm x 11.40cm (10.08" x 4.65" x 4.49" ) W, D, H UK: 25.60cm x 11.80cm x 11.40cm (10.08" x 4.65" x 4.49" ) W, D, H
Shipping Weight	US: 0.5kg (1.1lbs) approx EU: 0.9kg (1.9lbs) approx UK: 0.9kg (1.9lbs) approx





## CONFIGURATIONS

WP-20/US(W)	US-D-size WP-20 with white 2-gang DECORA® frame, faceplate set, power adapter and US power cord
WP-20/US(B)	US-D-size WP-20 with black 2-gang DECORA® frame, faceplate set, power adapter and US power cord
WP-20/EU(W)-80	EU-size WP-20 with white 2-gang frame, faceplate set, power adapter and EU power cord
WP-20/EU(B)-80	EU-size WP-20 with black 2-gang frame, faceplate set, power adapter and EU power cord
WP-20 / UE (G) -80	WP-20 de tamaño europeo con marco gris de 2 elementos^ conjunto de placa frontal^ adaptador de corriente y cable de alimentación de la UE
WP-20/EU(W)-86	UK-size WP-20 with white 2-gang frame, faceplate set, power adapter and EU power cord
WP-20/EU(B)-86	UK-size WP-20 with black 2-gang frame, faceplate set, power adapter and EU power cord
WP-20/JP(W)	US-D-size WP-20 with white 2-gang DECORA® frame, faceplate set, power adapter and Japan power cord
WP-20/JP(B)	US-D-size WP-20 with black 2-gang DECORA® frame, faceplate set, power adapter and Japan power cord

