

Specifications

Cable Cubby® 202

General

Power output

US model 125 VAC, 50-60 Hz, 12 A max total

Non-US models..... 240 VAC, 50-60 Hz, 10 A max total

Mounting Furniture mount

Min./max. table thickness 0.25" to 1.75" (6 mm to 44 mm)


Enclosure dimensions

Top plate (outer rim)..... 7.99" W x 4.39" D (203 mm W x 112 mm D)


Surface cutout (inside rim) 7.00" W x 3.25" D (178 mm W x 82 mm D)

Enclosure depth 3.20" H (81 mm H)

Allow an additional 2.50" (64 mm) depth to account for the attached AC power cord bend radius

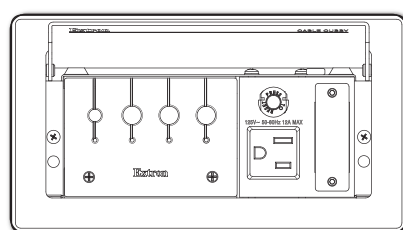


Cable Cubby 222 US

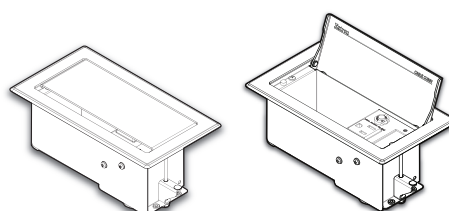


Lid Closed

Lid Open

Cable Cubby 222 US

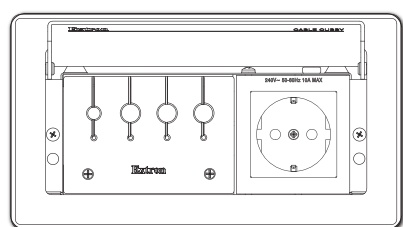


Cable Cubby 202 EU

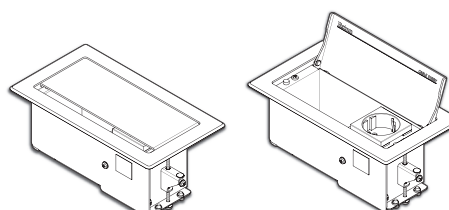

Lid Closed

Lid Open

Cable Cubby 202 EU

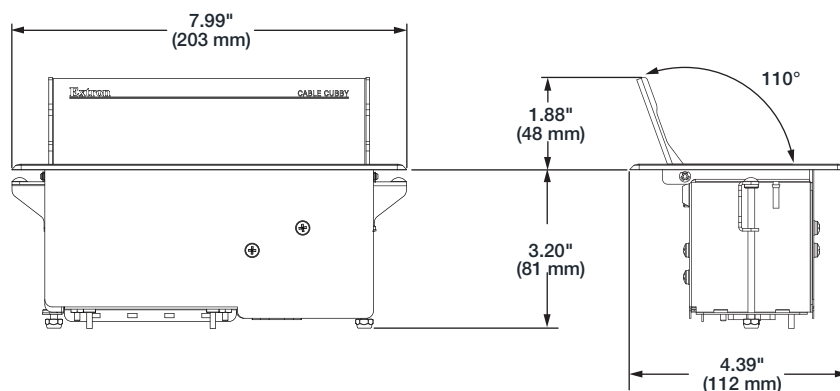

Specification • Cable Cubby® 202 (Continued)

Material.....	Metal
Product weight	
US model	2.5 lbs (1.1kg)
Non-US models.....	1.8 lbs (0.8 kg)
Regulatory compliance.....	CE, RoHS, WEEE
US model	UL, c-UL
Warranty	3 years parts and labor

NOTE: Specifications are subject to change without notice.

NOTE: Shipping weights and dimensions are available at www.extron.com.

5331-D5