

MODEL L-75i+

DROP-DOWN TV LIFT For Up to 75" TV

Lift Extends	52" [132.1 cm] Downwards
TV Maximum Screen Size	75″
Maximum Weight	100 lbs [45.4 kg]

Model L-75i+ converts any room into a custom movie theater by smoothly lowering large TV screens into view at the push of a button. Precision-engineered for ease of installation and superior reliability, this lift has been installed in more luxury homes, government facilities and royal palaces than any other mechanism.

- Industry-Leading Reliability
- Near Silent Operation
- Includes Mounting Kit for Your Ceiling Cover
- Popular for Hiding TVs in the Ceiling



Nexus 21 solutions come complete with everything required for assembly and installation. Motorized systems are covered by a 10-year warranty and all products are backed by our world-class product support team.

MODEL L-75i+

TECHNICAL SPECIFICATIONS

- 100 lbs [45.4 kg] total lift capacity
- TV maximum screen size: 75"
- Travels 52" [132.1 cm]
- No exposed tracks, gears or scissors
- UL recognized components
- Draws 3.5 Amps @ 110V and 1.75 Amps @ 220V at max thrust
- Speed 3.5" [8.9 cm] / sec. (only 15 sec to fully lower)
- Quiet runs at just 45 dB
- Chain-driven mechanism
- Steel construction
- Choice of RF remote, Control System Integration Kit (includes IR remote and contact closure interface), or IP control device
- Exclusive Nexus 21 Safety Package included
- "Soft Start" and "Soft Stop" for smooth ride
- Professional installation required
- Power is available in these formats: USA, 110V / Europe, 230V / Japan, 100V / Australia, 240V / UK, 230V

WHAT'S IN THE BOX


- Motorized lift column (the motorized unit is pre-assembled and ready to use)
- Heavy duty screen support with universal TV mounting plate
- Height adjustable top supports
- Lid plate with stabilization hardware
- Base plates and upper back mounting brackets
- Control box with power cord
- Remote control and receiver
 (your choice of RF, CSI Kit*, or IP control device)
- Backup control switch
- Cord control wraps
- All hardware for assembly and mounting
- Full assembly instructions with photos







**Designed for ceiling height of 8-10 feet [2.4-3.0 meters]

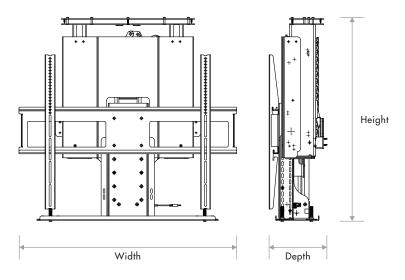

Height:


Width: 33-1/2" Min [85.1cm]/45-1/8" [114.6cm] Max

Depth: 36" [91.5 cm]

m: 9" [22.9 cm] from back wall to rear of TV

CONTROL OPTIONS

Choice of RF remote, CSI Kit*, or IP control device. Wired button pad included with all.



*CSI Kit (Control System Integration) includes IR remote and contact closure interface

MOUNTING BRACKET FOR CEILING COVER

Match any ceiling material to seamlessly hide the lift within the ceiling (weight limit applies). Spring loaded lid stabilization hardware included.





INCLUDED!

Button Pad