

# FAN OPTIONS

## CONTROL TEMPERATURE WITHIN AN ENCLOSURE WITH FAN OPTIONS AND ACCESSORIES

### FAN-119

- 230V (50/60 Hz) nominal fan rated at 2.7 m<sup>3</sup>/min.
- 39 dBA (measurements made 1 meter from source, centered horizontally and vertically)
- Smooth, long life ball-bearing design



FAN-119

### QFAN-119

- 230V (50/60 Hz) nominal fan rated at 1.4 m<sup>3</sup>/min.
- <30 dBA (measurements made 1 meter from source, centered horizontally and vertically)
- Quiet fan includes fan guard with black powder coat finish
- Smooth, long life ball-bearing design
- Used in:
  - QFP-1-119 (one fan) and QFP-2-119 (two fans) black anodized fan panels; QTFP-1-119 and QTFP-2-119 black textured powder coat fan panels



QFAN-119

### FAN-254

- 230V (50/60 Hz) nominal fan rated at 15.6 m<sup>3</sup>/min.
- 49 dBA (measurements made 1 meter from source, centered horizontally and vertically)
- Smooth, long life ball-bearing design



QFAN-254

### AXS-FAN-119

- 230V (50/60 Hz) nominal fan rated at 1.6 m<sup>3</sup>/min.
- 30 dBA (measurements made 1 meter from source, centered horizontally and vertically)
- Slim design fits AXS Series rack
- Smooth, long life ball-bearing design
- Overtemp and fan failure notification via contact closure



AXS-FAN-119

### IUQFP SERIES ULTRA QUIET FAN PANEL

- 2.8 m<sup>3</sup>/min. in 4 fan units, 1.4 m<sup>3</sup>/min. in 2 fan units
- Minimal friction, long-lasting hydro-wave-bearing design
- Power supply with 1.8 meter cord
- Quiet operation, 27 dBA at full speed for 4 fan models, 24 dBA at full speed for 2 fan models
- Temperature display, LED indicators and designer-inspired aesthetic treatments available
- Fan speeds proportional to temperature of enclosure to extend fan life, reduce dust and maintenance



IUQFP-4D


# FAN OPTIONS

## CONTROL TEMPERATURE WITHIN AN ENCLOSURE WITH FAN OPTIONS AND ACCESSORIES


### SPECIFICATIONS FOR FAN OPTIONS

Model #	Size	Voltage (V nominal)	Current (mA)	Speed (RPM)	Noise (dBA)	Static Pressure (Pa)	Airflow (m3/min)
QFAN-119	119mm x 119mm x 38mm	230	45	1450	<30	17.4	1.4
FAN-119	119mm x 119mm x 38mm	230	100	2750	39	64.8	2.7
FAN-254	254mm x 89mm thk	230	250	1650	49	90.9	15.6
AXS-FAN-119	119mm x 119mm x 25.4mm	230	34	2300	30	22.4	1.6

**Mounting hole dimensions for FAN-254**

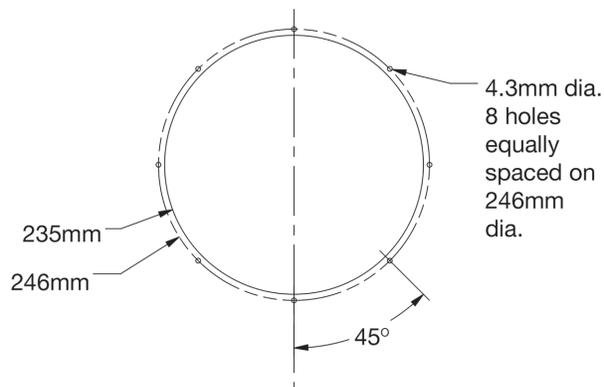

**Mounting hole dimensions for QFAN-119, FAN-119, AXS-FAN-119**

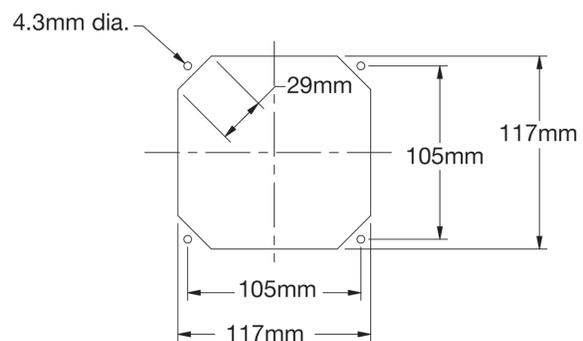

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

WHAT GREAT SYSTEMS ARE BUILT ON™ | [legrandav.com](http://legrandav.com)

USA 800.266.7225 [av.middleatlantic.support@legrand.com](mailto:av.middleatlantic.support@legrand.com) CANADA 888.766.9770 [av.middleatlantic.support@legrand.com](mailto:av.middleatlantic.support@legrand.com)

©2021 Legrand AV Inc. 210549 Rev A 8/21 Middle Atlantic is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.