

## Specifications

### MLC 55 RS

#### Communication — host port

|                              |  |
|------------------------------|--|
| USB host port.....           | USB mini B, front panel behind faceplate   |
| USB standards .....          | USB 2.0, low speed   |
| IR learning frequencies..... | 30 kHz to 300 kHz  |
| IR learning distance.....    | 4" (10 cm) to 14" (36 cm) from the receiver  |
| Program control .....        | Extron MLC 55, 62 and 64 Series Configuration Program for Windows®<br>Extron Simple Instruction Set (SIS™) |

#### Communication — serial port

|                                     |  |
|-------------------------------------|--|
| Serial control port.....            | (1) 3.5 mm captive screw connector, 2 pole, ground pin shared with IR port, for unidirectional RS-232 control (±5 V)                     |
| Baud rate and protocol (RS-232) ... | 9600 (default), 19200, 38400, 57600, or 115,200 baud; 8 (default) or 7 data bits; 1 stop bit; no parity (default), or even or odd parity |

#### Communication — IR port

|                      |   |
|----------------------|---|
| IR control port..... | (1) 3.5 mm captive screw connector, 2 pole, ground pin shared with serial port (transmit only)<br>TTL level (0 to 5 V) modulated infrared control from 30 kHz up to 300 kHz |
|----------------------|---|


#### General

|                               |  |
|-------------------------------|--|
| Power supply .....            | External<br>Input: 100-240 VAC, 50-60 Hz<br>Output: 12 VDC, 0.5 A, 6 watts   |
| Power consumption             |  |
| Device .....                  | 1.1 watts, 12 VDC  |
| Device and power supply ..... | 1.5 watts, 100-240 VAC, 50-60 Hz   |
| Temperature/humidity .....    | Storage: -40 to +158 °F (-40 to +70 °C) / 10% to 90%, noncondensing<br>Operating: +32 to +122 °F (0 to +50 °C) / 10% to 90%, noncondensing |
| Cooling .....                 | Convection, no vents   |
| Thermal dissipation           |  |
| Device .....                  | 3.6 BTU/hr   |
| Device and power supply ..... | 4.9 BTU/hr   |
| Mounting .....                | Wall or furniture mount<br>Mount in a standard 1 gang US electrical junction box or with included mud ring.                                |
| Enclosure type .....          | Plastic  |

Specification • MLC 55 RS (Continued)

Enclosure dimensions

|                 |  |
|-----------------|--|
| Faceplate ..... | 4.50" H x 2.75" W x 0.30" D<br>(11.43 cm H x 6.99 cm W x 0.76 cm D)  |
| Device .....    | 2.81" H x 1.76" W x 1.41" D<br>(7.14 cm H x 4.47 cm W x 3.58 cm D)   |
|                 | Fits inside a standard US 1 gang junction box.<br>(Depth includes connectors. Allow enough depth in the junction box for device plus cable clearance.) |

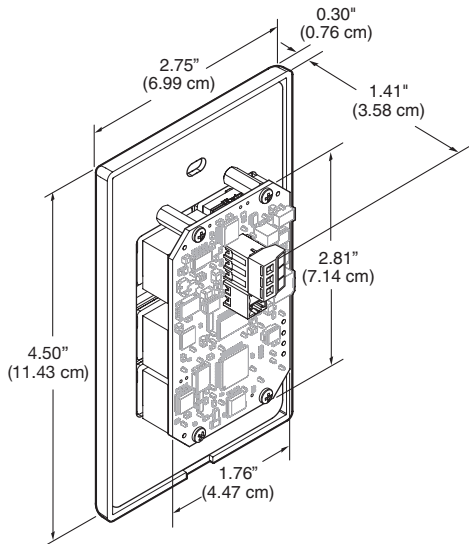

MLC 55 RS  
Rear

|                                     |   |
|-------------------------------------|---|
| Product weight .....                | 0.26 lbs (0.1 kg)   |
| Regulatory compliance.....          | CE, C-tick, c-UL, UL, FCC Class A, ICES, VCCI Class A<br>Section 508 of the Rehabilitation Act (29 U.S.C. 794d) |
| Product warranty .....              | 3 years parts and labor   |
| Everlast power supply warranty..... | 7 years parts and labor   |

- NOTE:** All nominal levels are at  $\pm 10\%$ .
- NOTE:** Specifications are subject to change without notice.
- NOTE:** Shipping weights and dimensions are available at [www.extron.com](http://www.extron.com).

4354-D4