# PWB-320 / PWB-323

# **Project Wall Boxes**



# **Metal Products Group**





(Shown with optional equipment installed)



Optional International internal socket bracket for use with 45mm sockets

#### **DESCRIPTION**

These economical, large opening wall boxes are designed to fit in 16" on-center stud bays. Their design simplifies audio video and IT installations by providing space for routing cables, AC power connections, and digital media products. The PWB-320 is for 4" stud walls and has up to 2" KO's. The PWB-323 is for 3" stud walls and has up to 1¼" KO's.

All boxes come standard with 8 flush cable-tie mounts, 6 Triple-Play<sup>TM</sup> mounting solutions for AC/AV/IT, 6 IPS mounting openings, a grounding screw, steel stud mounting brackets and hardware for new or old-work wood or steel stud walls.

The PWB-32x-TRK kit includes all of the above features plus a powder coated trim ring for dressing the dry-wall opening. This rounded trim ring provides a generous 7/8" overlap.

The PWB-32x-ESK kit includes the above TRK features and an internal shelving system. Two adjustable shelves include a hole pattern that allows for any screw spacing from 3/8" to 11¾" including multiple VESA 100 hole pattern locations.

The PWB-320-CV is an optional powder coated cover with rounded cable exits. The vented cover mounts to the trim ring with four tool-less snap fasteners to allow quick access to the equipment inside.

There are optional internal AC brackets available with 2 or 3 Decora SpikeShield™ 15-amp surge protected receptacles. See ordering table for model numbers. Need to keep your equipment cool while in the wall, our optional PWB-320-Fan will do just that. The PWB-320-FAN is a variable speed temperature controlled fan option for the PWB-320 and 320XL wall box. Whisper quiet, the fan produces a 24dBA SPL at an 80-watt heat load. It is designed to maintain an internal box temperature below 104°F with a 100 watt thermal load keeping internal equipment at a safe temperature.

#### **APPLICATIONS**

- Digital Signage
- Hospitals
- Conference Centers
- Schools
- Airports

- Command Centers
- Electronic Billboards
- Museums
- Arenas

#### **FEATURES**


- Mounts to wood or steel studs, 16" centers
- No extra parts needed for New or Old work installations
- Can be ordered individually or in 3 different kits and in 2 depths
- Optional painted cover with cable exits and tool-less fasteners
- Up to 2" KO on PWB-320
- Up to 1-1/4"KO on PWB-323
- Six IPS mounting openings
- Eight Flush cable-tie mounts
- Six Triple Play Mounting Solution openings per box
- Optional Cover and Trim Ring available separately
- Optional (2) adjustable component shelves with position lock
- Optional AC power brackets with 15-amp surge protected receptacles
- Optional thermostat controlled variable speed fan
- Optional International internal socket bracket for use with 45mm sockets

## FSR Inc.

244 Bergen Boulevard, Woodland Park, NJ 07424 Phone: 973.998.2300 · Fax: 973.785.4207 Web: www.fsrinc.com · E-mail: sales@fsrinc.com

Toll Free: 1-800-332-FSR1

## AC POWER BRACKETS

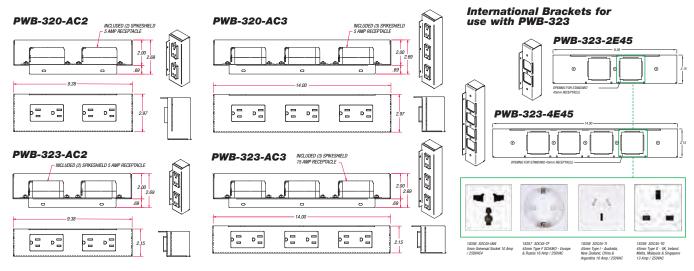

## **AC POWER BRACKET LOCATIONS**







PWB-320-AC3



PWB-323-AC2



PWB-323-AC3



PWB-320/323 AC Power Bracket total number of available positions shown for each AC Power Bracket style.

#### PWB COOLING FAN.

PWB-320-FAN









## ORDERING TABLE

| Item # | Model #      | Description  |
|--------|--------------|--|
| 18004  | PWB-320-BX   | Full size wall box with mounting hardware  |
| 18005  | PWB-320-TRK  | Kit consisting of full size box with finished Trim Ring                          |
| 18006  | PWB-320-ESK  | Kit consisting of full size box, with 2 equipment shelves and finished trim ring |
| 18009  | PWB-320-AC2  | Internal AC bracket with 2 Decora SpikeShield™ 15 amp Receptacles                |
| 18010  | PWB-320-AC3  | Internal AC bracket with 3 Decora SpikeShield™ 15 amp Receptacles                |
| 18007  | PWB-320-TR   | Decorative finished trim ring only (fits PWB-320 and PWB-323)                    |
| 18008  | PWB-320-CV   | Decorative Cover only (fits PWB-320 and PWB-323)                                 |
| 18011  | PWB-323-BX   | Full size wall box with mounting hardware  |
| 18012  | PWB-323-TRK  | Kit consisting of full size box with finished Trim Ring                          |
| 18013  | PWB-323-ESK  | Kit consisting of full size box, with 2 equipment shelves and finished trim ring |
| 18014  | PWB-323-AC2  | Internal AC bracket with 2 Decora SpikeShield™ 15 amp Receptacles                |
| 18015  | PWB-323-AC3  | Internal AC bracket with 3 Decora SpikeShield™ 15 amp Receptacles                |
| 18055  | PWB-320-SMK  | Shelf Kit - 2 Shelves and Side Brackets  |
| 18056  | PWB-323-SMK  | Shelf Kit - 2 Shelves and Side Brackets  |
| 18366  | PWB-320-FAN  | Fan option for use with PWB-320 and PWB-320XL boxes                              |
| 18593  | PWB-323-4E45 | Internal 45mm Bracket with 4 - 45mm Socket Openings                              |
| 18594  | PWB-323-2E45 | Internal 45mm Bracket with 2 - 45mm Socket Openings                              |















#### TRIPLE PLAY KNOCKOUT SYSTEM



#### **VESA 100 MOUNTING PATTERN**




FSR PWB boxes are punched in six locations with FSR's Triple Play Mounting Solution which provides three different options for mounting conduit, cabling, plates, and back boxes to our wall boxes.

FSR's patent-pending Triple Play Mounting Solutions:

- 1. Conduit can be run directly to the Center 1" & 11/4" Concentric Knock Out
- 2. Punched & Tapped for Low-voltage Class-2 box-less plate mounting
- 3. Tapped to mount standard single gang low-voltage boxes

#### **SHELVING FEATURES**


Shelving location and depth can be adjusted as well as mounted in horizontal or vertical orientation

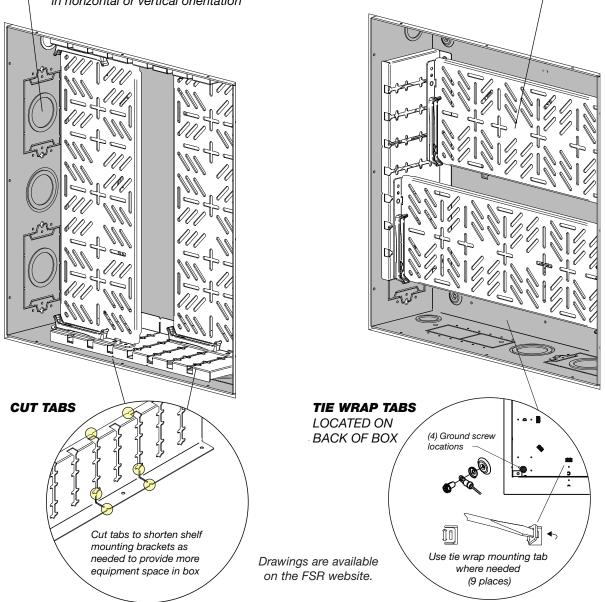


## **DIMENSIONS / DETAILS**

## **BOX SIDE DETAILS**

LETTERS (A,B,C,D) DENOTE THE SIDES OF THE BOX FOR REFERENCE

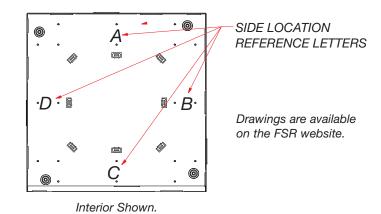

#### PWB-320

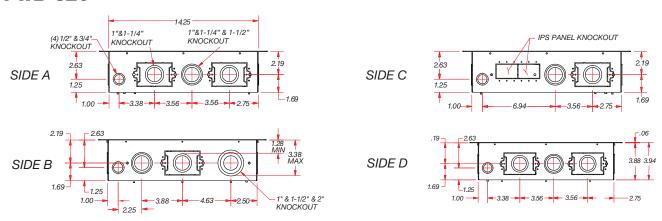

#### PWB-323

