




# KRAMER

## WP-110

Active Wall Plate - Computer Graphics Video Transmitter

---

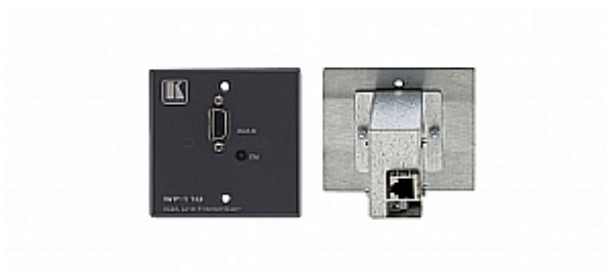

The **WP-110** is a wall plate transmitter for computer graphics video signals with resolutions up to and exceeding UXGA. It converts a computer graphics video signal into a twisted pair signal that it transmits to the TP-120 receiver or other compatible Kramer receiver.

Available in Gray, White & Off-White

### FEATURES

---

- Max. Resolution - WUXGA & 1080p.
- HDTV Compatible.
- **Power Connect™ System** - A single connection to the transmitter or the receiver powers both units when the devices are within 50m (150ft) of each other. All the system units must have the Power Connect system to use this feature.
- **Advanced Sync Processing** - Ensures compatibility with a wide range of computers.
- **Front Panel Connection** - 15-pin HD (F) input.
- **Rear Panel Connection** - RJ-45 output.
- **Sync Polarity Settings** - H & V switches for improved display compatibility with the CAT 5 outputs.
- **System Range** - Up to 100m (320ft).
- **Cable** - UTP (unshielded twisted pair) or STP (shielded twisted pair) such as CAT 5.
- **Dimensions** - 6.9cm x 4.1cm x 11.4cm (2.71" x 1.63" x 4.49") US; 8.6cm x 4.1cm x 8.6cm (3.39" x 1.63" x 3.39") and 8cm x 4.1cm x 8cm (3.15" x 1.63" x 3.15") EU W, D, H.
- **Optional** - RK-121WP 19" rack adapter (for EU size wall plates only).

### TECHNICAL SPECIFICATIONS

---

INPUT:	1 VGA/UXGA on a 15-pin HD connector.
OUTPUTS:	1 RJ-45 LINE OUT connector.
MAX. RESOLUTION:	WUXGA & 1080p.
DIFF. GAIN:	2.9% (worst case).
DIFF. PHASE:	0.3Deg (worst case).
K-FACTOR:	<0.05%.
S/N RATIO:	70dB (worst case).
COUPLING:	AC.
POWER CONSUMPTION:	12V DC, 60mA.
OPTIONS:	RK-121WP 19" rack adapter.
INCLUDED ACCESSORIES:	Power supply.
PRODUCT DIMENSIONS:	8.00cm x 3.60cm x 8.00cm (3.15" x 1.42" x 3.15" ) W, D, H
PRODUCT WEIGHT:	0.1kg (0.2lbs) approx.
SHIPPING DIMENSIONS:	8.00cm x 10.00cm x 5.80cm (3.15" x 3.94" x 2.28" ) W, D, H
SHIPPING WEIGHT:	0.4kg (0.8lbs) approx.