
INSTALLATION INSTRUCTIONS



Interface Bracket for J-Series

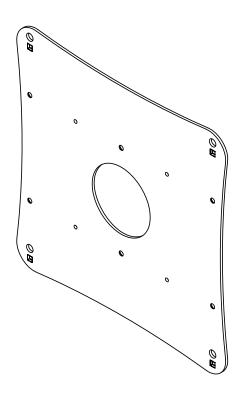

JSB210

DISCLAIMER

Milestone AV Technologies, Inc., and its affiliated corporations and subsidiaries, intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® and Centris $^{\text{TM}}$ are registered trademarks of Milestone AV Technologies. All rights reserved.



WARNING: A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.



CAUTION: A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.



WARNING: Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty! It is the installer's responsibility to make sure all components are properly assembled and installed using the instructions provided.




WARNING: Failure to provide adequate structural strength for this component can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the structure to which this component is attached can support five times the combined weight of all equipment. Reinforce the structure as required before installing the component.



WARNING: Exceeding the weight capacity of the mount can result in serious personal injury or damage to equipment! It is the installer's responsibility to make sure the combined weight of the mount and all attached components does not exceed 75 lbs (34 kg).

DIMENSIONS

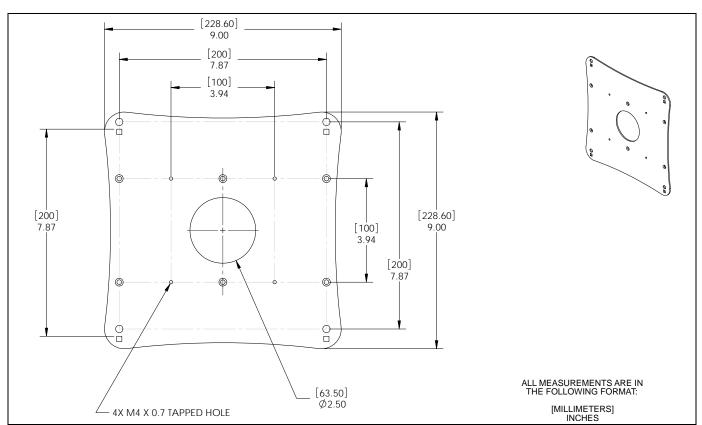


Installation Instructions JSB210


LEGEND

	Tighten Fastener	Pencil Mark
_	Apretar elemento de fijación	Marcar con lápiz
G	Befestigungsteil festziehen	Stiftmarkierung
	Apertar fixador	Marcar com lápis
	Serrare il fissaggio	Segno a matita
	Bevestiging vastdraaien	Potloodmerkteken
	Serrez les fixations	Marquage au crayon
	Loosen Fastener	Drill Hole
	Aflojar elemento de fijación	Perforar
	Befestigungsteil lösen	Bohrloch
	Desapertar fixador	Fazer furo
	Allentare il fissaggio	Praticare un foro
	Bevestiging losdraaien	Gat boren
	Desserrez les fixations	Percez un trou
	Phillips Screwdriver	Adjust
	Destornillador Phillips	Ajustar
	Kreuzschlitzschraubendreher	Einstellen
	Chave de fendas Phillips	4T.
	Cacciavite a stella	Ajustar
		Regolare Afstellen
	Kruiskopschroevendraaier	
	Tournevis à pointe cruciforme	Ajuster
0	Open-Ended Wrench	Remove
	Llave de boca	Quitar
	Gabelschlüssel	Entfernen
	Chave de bocas	Remover
	Chiave a punte aperte	Rimuovere
	Steeksleutel	Verwijderen
	Clé à fourche	Retirez
	By Hand	Optional
	A mano	Opcional
	Von Hand	Optional
	Com a mão	Opcional
	A mano	Opzionale
	Met de hand	Optie
	À la main	En option
	Hex-Head Wrench	Security Wrench
	Llave de cabeza hexagonal	Llave de seguridad
	Sechskantschlüssel	Sicherheitsschlüssel
	Chave de cabeça sextavada	Chave de segurança
	Chiave esagonale	Chiave de segurança Chiave de segurança
	Zeskantsleutel	Veiligheidssleutel
	Clé à tête hexagonale	Clé de sécurité
	Tote a tete nexagonale	Cie de Securite

TOOLS REQUIRED FOR INSTALLATION

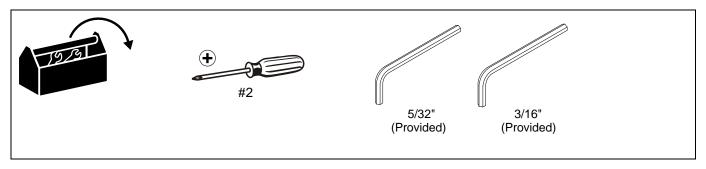

PARTS

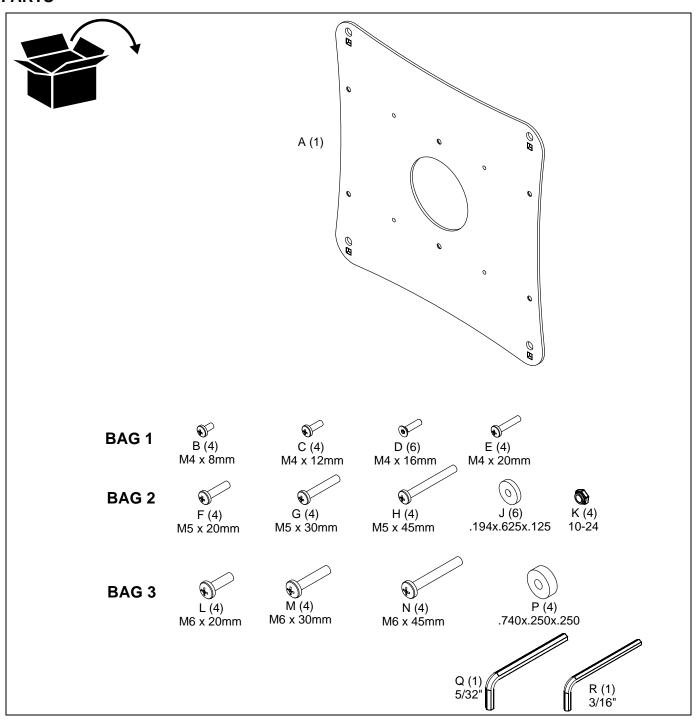

Installation Instructions JSB210

INSTALLATION

WARNING: IMPROPER INSTALLATION CAN LEAD TO MOUNT FALLING CAUSING SERIOUS PERSONAL INJURY OR DAMAGE TO EQUIPMENT! DO NOT substitute hardware. Only use hardware provided or specified by manufacturer.

1. Determine pattern of mounting holes in back of display.

WARNING: IMPROPER INSTALLATION CAN LEAD TO DAMAGE TO EQUIPMENT OR TO MOUNT FALLING CAUSING SERIOUS PERSONAL INJURY! Use proper size and length hardware depending on display.

200mm x 100mm Mounting Hole Pattern

 Use six nylon spacers (J) and six flat head screws (D) to attach JSB210 interface bracket to the display back. (See Figure 1)

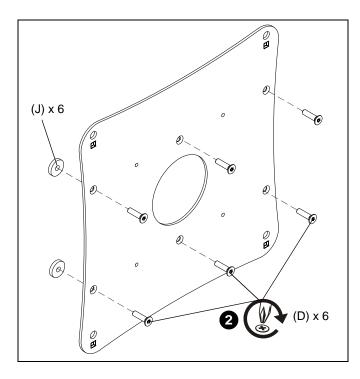


Figure 1

200mm x 200mm Mounting Hole Pattern

 Use four nylon spacers (J or P) and four Phillips cap head screws (E through H, L through N) to attach JSB210 interface bracket to the display back. (See Figure 2)

NOTE: Phillips cap head screws should be placed through either the square or round holes in the interface bracket corners.

- Use M4 cap head screws through SQUARE holes
- Use M6 cap head screws through ROUND holes.

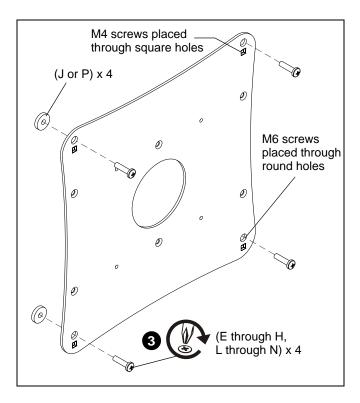


Figure 2

 Λ

CAUTION: PREVENT EQUIPMENT DAMAMGE! Tighten each screw carefully, but do NOT overtighten.

Attach Display to Mount

- 1. Start two Phillips pan head screws into top mounting holes on interface bracket (A). (See Figure 3)
- Align two screws in interface bracket (A) with upper mounting holes in Centris cup and lower display until screws are seated in lower area of teardrop mounting holes. (See Figure 3)




Figure 3

 Hold display so that display back is against Centris cup and install two Phillips pan head machine screws through lower mounting holes in Centris cup and into lower mounting holes in interface bracket (A). (See Figure 4)

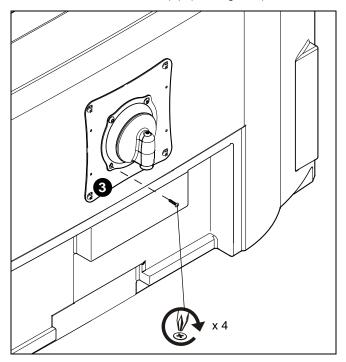


Figure 4

4. Complete installation of mount to display, following instructions included with the mount.

Installation Instructions JSB210



Chief Manufacturing, a division of Milestone AV Technologies

8832-000251 ©2008 Milestone AV Technologies www.chiefmfg.com 06/08 **USA/International**

A 8401 Eagle Creek Parkway, Savage, MN 55378

P 800.582.6480 / 952.894.6280

F 877.894.6918 / 952.894.6918

A Fellenoord 130 5611 ZB EINDHOVEN, The Netherlands

P +31 (0)40 2668620

F +31 (0)40 2668615

Asia Pacific

Europe

A Room 24F, Block D, Lily YinDu International Building

LuoGang, BuJi Town, Shenzhen, CHINA.

深圳市布吉罗岗村百合银都国际大厦D栋24F

+86-755-8996 9226 +86-755-8996 9217

