

C2N-DBF12

Decorator Function Keypad

The Decorator Series C2N-DBF12 Function Keypad provides a cost-effective solution for controlling a Crestron® Multiroom AV distribution system. It is identical to the C2N-DB12 12-Button Decorator Keypad except that it includes a set of 30 assorted button caps pre-labeled for AV source selection and basic control functions.

For enhanced control using direct numeric entry for channel and track selection, add the C2N-DBN12 Numeric Keypad.

Please note, the almond smooth (-A-S) and white smooth (-W-S) finishes currently offered are not the same as on older almond (A) and white (W) models. When ordering, please be sure to specify the model number exactly as shown in the price list or on the "Models & Accessories" tab. If you require buttons or keypads to match the older almond or white finishes, please contact your Crestron representative.

- > A decorator-style wall mount keypad with 12 buttons
- > Includes 30 pre-labeled button caps for basic AV system control
- > Enables selection of six AV sources
- > Enables control of power, volume, mute, and incremental channel or track selection
- > Optional numeric keypad for direct entry of channel or track, sold separately
- > Red LED feedback indicators
- > Fits standard electrical gang boxes and faceplates
- > Available in smooth almond, black, and white finishes
- > Cresnet® wired communications

SPECIFICATIONS

Buttons

Keypad Buttons: (12) programmable pushbuttons

Button Caps: Includes 30 pre-labeled button caps: ADAGIO, AM, AUX, CD, DSS, DSS 2, DVD, FM, FM 2, IPOD, IPOD 2, JUKE, JUKE 2, MUSIC, MUTE, ON-OFF, SAT, SAT 2, SERVER, SIRIUS, SIRIUS 2, TUNER, TV, VCR, VOL <, VOL >, XM, XM 2, <, and >

Indicators

Feedback: (1 per button) red LED, programmable, software-adjustable intensity

Connectors

NET: (1) 4-pin 3.5mm detachable terminal block;
Cresnet slave port, connects to Cresnet control network

Power Requirements

Cresnet Power Usage: 3 Watts (0.125 Amps @ 24 Volts DC)



Environmental

Temperature: 32° to 113°F (0° to 45°C)

Humidity: 10% to 90% RH (non-condensing)

Construction

Chassis: Plastic

Mounting: Mounts in a 1-gang or larger electrical box or mud ring

Faceplate: Requires decorator style faceplate (not included)

Dimensions

Height: 4.16 in (106 mm) without faceplate

Width: 1.79 in (46 mm) without faceplate

Depth: 1.53 in (39 mm)

Weight

2.6 oz (75 g)

Available Models

C2N-DBF12-A-S: Decorator Function Keypad, Almond Smooth

C2N-DBF12B: Decorator Function Keypad, Black Smooth

C2N-DBF12-W-S: Decorator Function Keypad, White Smooth

Available Accessories

DB12-BTN-A-S: Engravable Button Cap for C2N-DB12 and C2N-DB8, Almond Smooth

DB12-BTNB: Engravable Button Cap for C2N-DB12 and C2N-DB8, Black Smooth

DB12-BTN-W-S: Engravable Button Cap for C2N-DB12 and C2N-DB8, White Smooth

CRESNET-NP-TL-B250: Cresnet® Control Cable, non-plenum, teal, 250 ft box

CRESNET-NP-TL-B500: Cresnet® Control Cable, non-plenum, teal, 500 ft box

CRESNET-NP-TL-SP500: Cresnet® Control Cable, non-plenum, teal, 500 ft spool

CRESNET-NP-TL-SP1000: Cresnet® Control Cable, non-plenum, teal, 1000 ft spool

CRESNET-NP-BK-B500: Cresnet® Control Cable, non-plenum, black, 500 ft box

C2N-DBF12 Decorator Function Keypad

CRESNET-NP-OR-B500: Cresnet® Control Cable, non-plenum, orange, 500 ft box
CRESNET-NP-YL-B500: Cresnet® Control Cable, non-plenum, yellow, 500 ft box
CRESNET-P-TL-SP500: Cresnet® Control Cable, plenum, teal, 500 ft spool
CRESNET-P-TL-SP1000: Cresnet® Control Cable, plenum, teal, 1000 ft spool
CRESNET-P-BK-SP500: Cresnet® Control Cable, plenum, black, 500 ft spool
CRESNET-P-OR-SP500: Cresnet® Control Cable, plenum, orange, 500 ft spool
CRESNET-P-YL-SP500: Cresnet® Control Cable, plenum, yellow, 500 ft spool
CRESNET-HP-NP-TL-SP500: Cresnet® "High-Power" Control Cable, non-plenum, teal, 500 ft spool
CRESNET-HP-NP-TL-SP1000: Cresnet® "High-Power" Control Cable, non-plenum, teal, 1000 ft spool
CCR-L-1: Crestron® Color Ring

Notes:



This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/salesreps or by calling 800-237-2041.

The specific patents that cover Crestron products are listed online at: patents.crestron.com.


Crestron, the Crestron logo, and Cresnet are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice. ©2013 Crestron Electronics, Inc.

C2N-DBF12 Decorator Function Keypad


Top

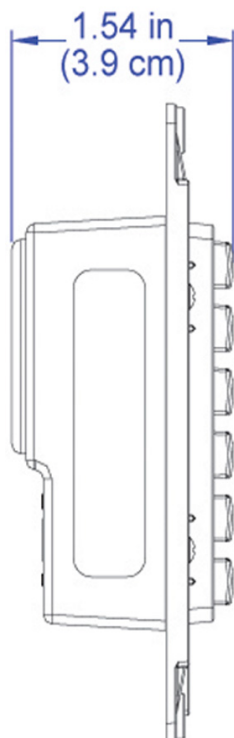


Left
Side

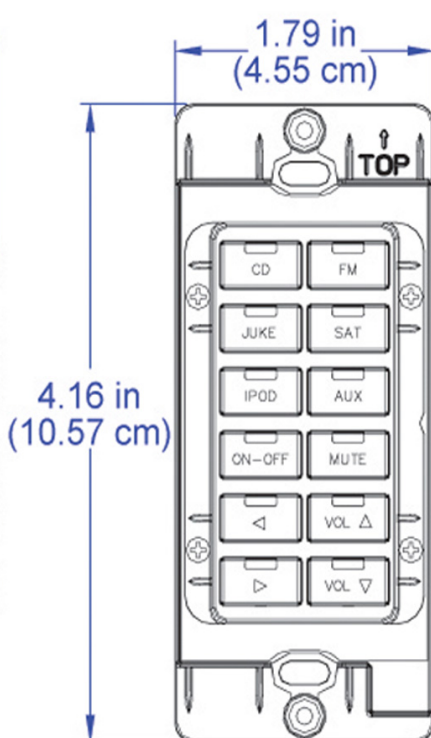

Front

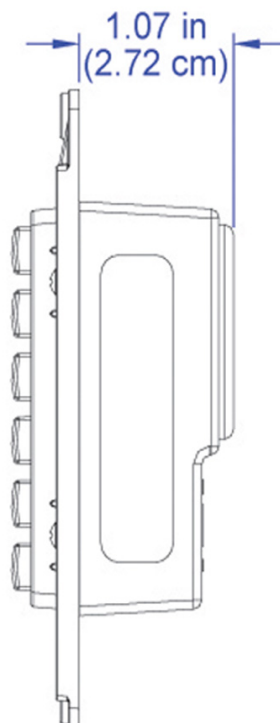

Right
Side

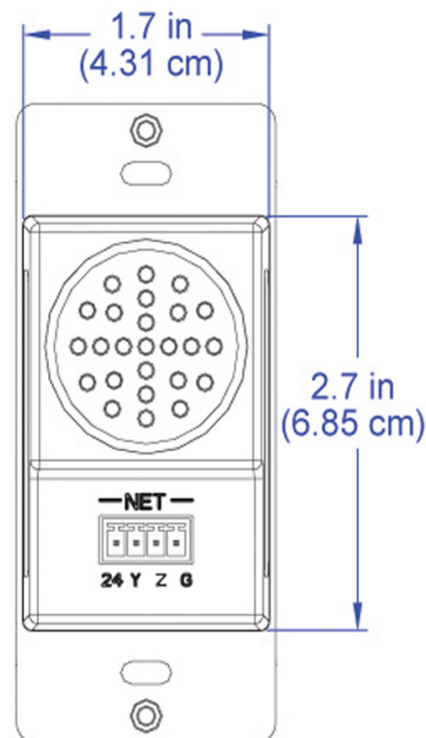

Back