

Quick Start Guide

Suspending the KLA Series Loudspeakers



WARNING! Read and follow these instructions carefully. If the loudspeakers are not suspended properly, they could fall, causing personal injury and damage to the equipment.

Rules for Suspension

- Consult a professional mechanical or structural engineer, licensed in the jurisdiction of the sound system installation, to review, verify, and approve all attachments to the building or structure.
- Employ the services of a certified, professional rigger for hoisting, positioning, and attaching the equipment to the supporting structure.
- Correct use of all suspension hardware and components is imperative in sound system suspension and deployment.
- Always calculate suspended loads before lifting to make sure suspension components and hardware are used within their respective load limits.
- Consult local codes and regulations to fully understand the requirements for suspended loads in the venue in which you will suspend the equipment.
- Use only the KLA AF12 Array Frame or the M10 installation points for suspending the array.
- Be absolutely certain of the integrity of any structural member intended to support suspended loads. Hidden structural members can have hidden structural weakness.
- Never assume anything! Owner or third-party supplied suspension attachment points may not be adequate for suspending the loads.
- Before lifting, always inspect all components (enclosures, suspension brackets, pins, frames, bolts, nuts, slings, shackles, etc.) for cracks, wear, deformation, corrosion, missing, loose, or damaged parts that could reduce the strength of the assembly. Discard any worn, defective, or suspect parts and replace them with new appropriately load-rated parts.

Shock Loading

When a load is either moved or stopped, its static weight is magnified. Sudden movements can magnify the static weight several times. This magnification of static weight is called "shock loading". Shock loading poses a danger to equipment and workers. The effects of shock loading can be instantaneous, or may remain undetected unless the equipment is visually damaged. Proper preparation for shock loading requires careful planning and knowledge of equipment, suspension, and lifting practices.

Shock loading of equipment and structures is usually confined to lifting and installation, but natural forces (winds, earthquakes, and so on) can impose shock loads several times the static load. Because of this, structures and suspension equipment must be capable of supporting several times the weight of the suspended equipment.

KLA Maximum Suspended Load

The KLA components are engineered for a 10:1 design factor. Use a KLA AF12 Array Frame or the M10 Integrated Suspension points to suspend one KLA Array consisting of one of the following array configuration options. The maximum number of KLA12 Loudspeakers in any array, with or without KLA181 Loudspeakers, is five.

Maximum Suspended Loudspeakers per Array


Array Configuration Option	A	B	C
Maximum Number of KLA181 Loudspeakers	2	3	4
Maximum Number of KLA12 Loudspeakers	5	3	0

– Table 1 –


TD-000335-00-A



Attaching KLA181 Loudspeakers Together

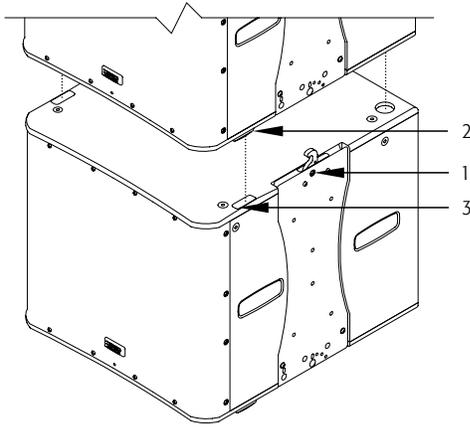

– Figure 1 –

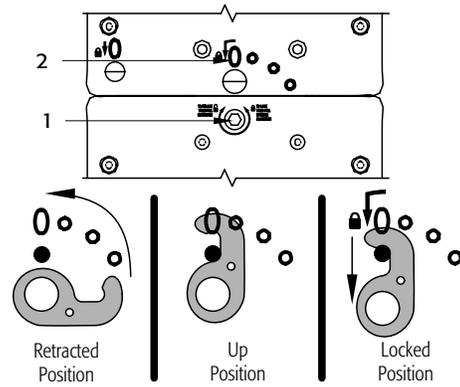

– Figure 2 –

1. Insert the supplied 6 mm hex key into the hex socket (Figure 1, 1) and make sure the hex key is rotated completely to the Unlock position.
2. Place a KLA181 on top of the first one with the loudspeakers facing the same direction. Make sure that the four feet (2) on the top KLA181 nest properly with the four feet receptacles (3) on the top of the bottom KLA181.



NOTE: The bottom portion of Figure 2 shows the motion of the hook during the latching process. This is not visible on the actual hardware.


3. Insert the 6 mm hex key into the hex socket (1) in the lower KLA181 and turn the key fully to the **Locked Position**. Repeat for the other side.
 - a. In the **Retracted Position**, you cannot see the hook in the view holes.
 - b. When the hook reaches the **Up Position**, the hook almost completely fills the large viewing (2) hole at the top.
 - c. In the final, Locked Position, you can see a small portion of the hook in the bottom of the large viewing hole (2).

Install KLA181 M10 KIT in Integrated Suspension Points



NOTE: The KLA181 suspension points are designed for use with the eyebolts (M10 X 1.50, 35 mm – 38 mm) included in the available accessory kit (model number: KLA181 M10 KIT).


1. Use a 6 mm hex key to remove the four hex screws from the four KLA181 M10 installation points on the top of the loudspeaker.
2. Thread an eyebolt (1) into each of the threaded inserts.
3. Tighten the eyebolts until their shoulders are snug against the enclosure.
4. Continue to rotate the eyebolts until they reach the desired position. Do not overtighten.
5. The loudspeakers are ready for suspension.

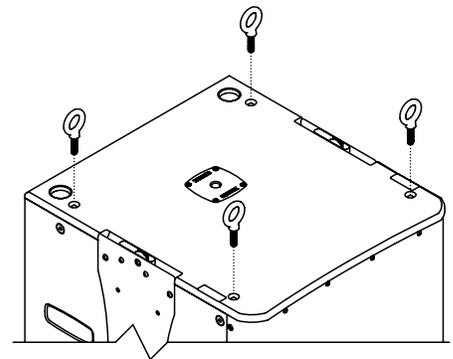


– Figure 3 –

Other KLA181 Deployment

In addition to the M10 rigging listed above, you can use a KLA AF12 array frame to suspend an array (Figure 4), you can pole-mount up to two KLA12s over a KLA181 (Figure 5).

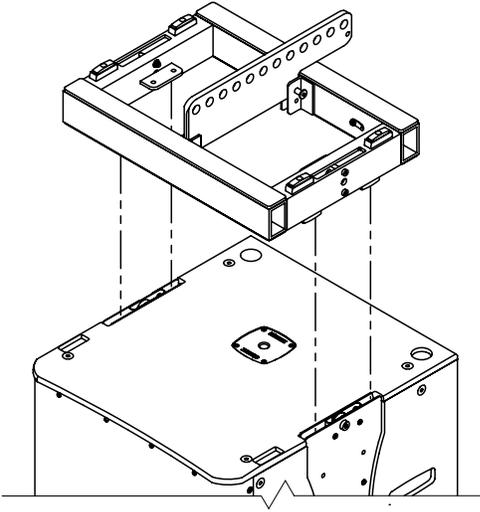


– Figure 4 –

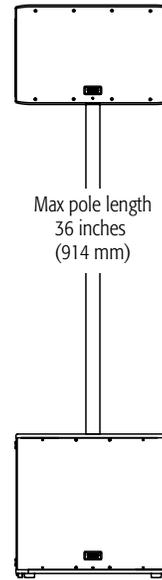

– Figure 5 –

Connections

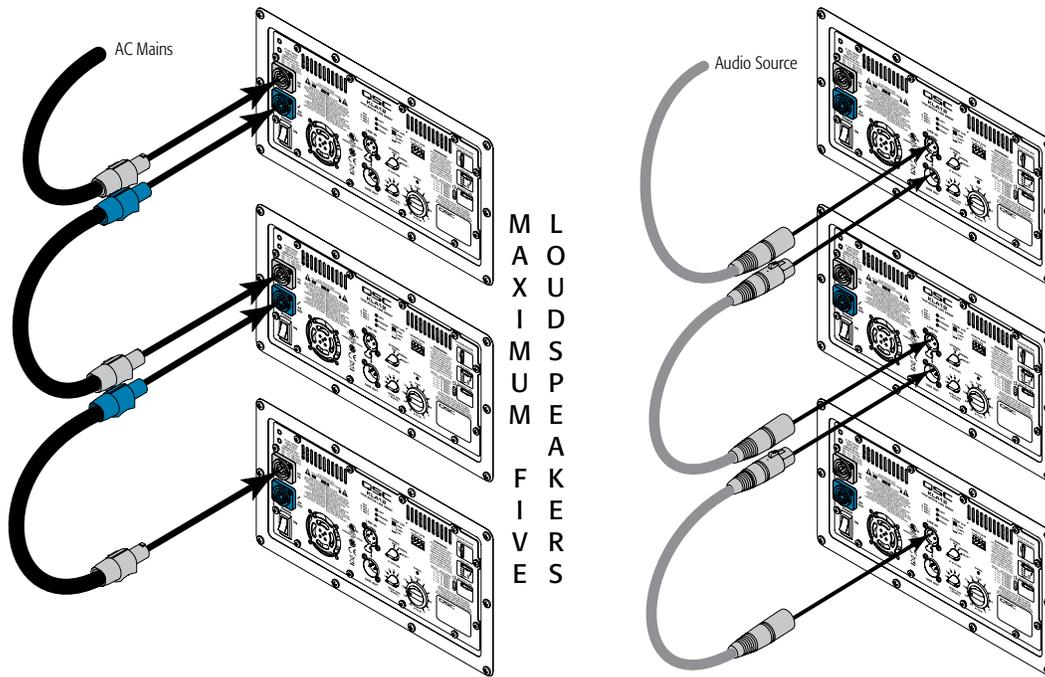

– Figure 6 –



WARNING! Do not connect more than five KLA Series loudspeakers together using the loop-thru power cables (four loop-thru cables, one AC power cord). Make all loop-thru connections prior to connecting to the AC mains.



CAUTION! Do not restrict airflow to the rear of the speaker enclosure. Do not expose the rear panels exposed to a heat source such as direct sunlight.



Mailing Address:

QSC Audio Products, LLC
1675 MacArthur Boulevard
Costa Mesa, CA 92626-1468 USA

Telephone Numbers:

Main Number: (714) 754-6175
Sales & Marketing: (714) 957-7100 or toll free (USA only) (800) 854-4079
Customer Service: (714) 957-7150 or toll free (USA only) (800) 772-2834

Facsimile Numbers:

Sales & Marketing FAX: (714) 754-6174
Customer Service FAX: (714) 754-6173

World Wide Web:

www.qscaudio.com

E-mail:

info@qscaudio.com
service@qscaudio.com
tech_support@qscaudio.com

If you would like a full copy of the KLA Series User manual, visit the QSC Audio Products website at www.qscaudio.com, or contact Customer Service +1 714 957-7150 or toll free (USA only) (800) 772-2834 to receive a copy by mail.

Si desea obtener una copia completa del manual del usuario de la serie KLA, visite el sitio web de QSC Audio Products en www.qscaudio.com, o póngase en contacto con el Servicio al Cliente al +1 714 957-7150 o sin costo (sólo en EE.UU.) al (800) 772-2834 para recibir una copia por correo.

Pour obtenir un exemplaire complet du manuel d'utilisation de la série KLA, allez sur le site Web QSC Audio Products à www.qscaudio.com ou contactez le service clientèle au +1 714 957-7150 ou au (800) 772-2834 (numéro vert - USA seulement) pour recevoir un exemplaire par courrier.

Ein vollständiges Exemplar des Benutzerhandbuchs für die KLA-Serie finden Sie auf der QSC Audio Products-Website unter www.qscaudio.com. Sie können sich unter +1 714 957-7150 oder unter der (nur in den USA) gebührenfreien Nummer +1 (800) 772-2834 auch an den Kundendienst wenden, um sich ein Exemplar zuschicken zu lassen.

如果您需要 KLA 系列产品用户手册的完整副本，请访问 QSC 音频产品网站 www.qscaudio.com，或致电客户服务部门 +1 714 957-7150，或拨打免费电话（仅限美国）(800) 772-2834 通过邮件获取副本。