


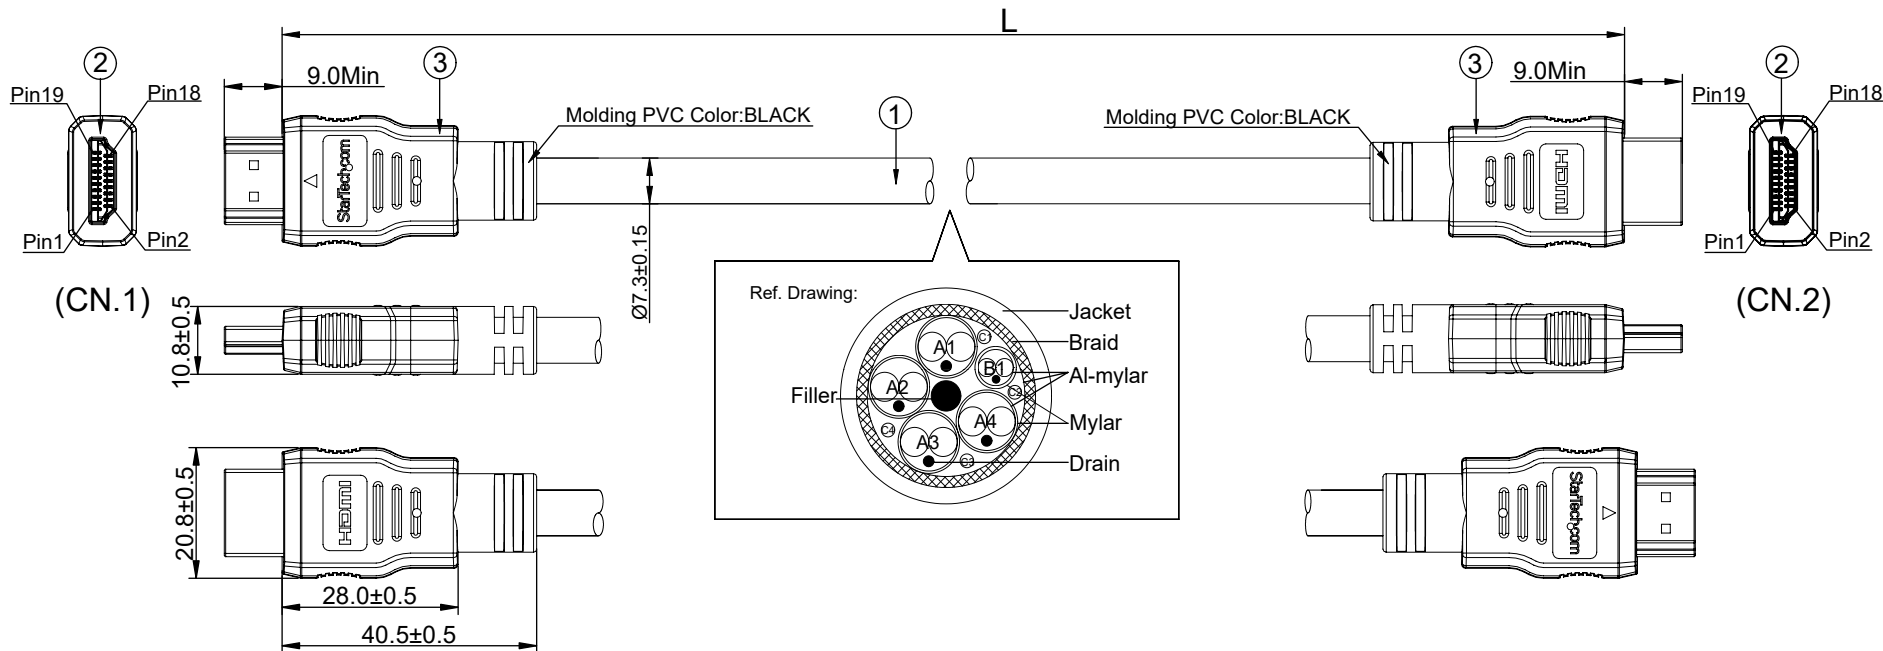


Wire Pin Assignment and Wire Description:

CN.1	Signal Assignment	CN.2	WIRE	
1	TMDS Data2+	1	WHITE	Transparent mylar
2	TMDS Data2 Shield	2	DRAIN	
3	TMDS Data2-	3	BLUE	
4	TMDS Data1+	4	WHITE	Red mylar
5	TMDS Data1 Shield	5	DRAIN	
6	TMDS Data1-	6	BLUE	Orange mylar
7	TMDS Data0+	7	WHITE	
8	TMDS Data0 Shield	8	DRAIN	Green mylar
9	TMDS Data0-	9	BLUE	
10	TMDS Clock+	10	WHITE	
11	TMDS Clock Shield	11	DRAIN	
12	TMDS Clock-	12	BLUE	
14	Utility/HEAC+	14	WHITE	
17	DDC/CEC Ground/HEAC Shield	17	DRAIN	
19	Hot Plug Detect/HEAC-	19	YELLOW	
13	CEC	13	PURPLE	
15	SCL	15	BLUE	
16	SDA	16	GREEN	
18	+5V Power	18	RED	
SHELL		SHELL	BRAID	

Length table:

Part NO.	Length(L)
HDMM1	305 $\pm$ 15
HDMM3	914 $\pm$ 30
HDMM6	1830 $\pm$ 50
HDMM8	2440 $\pm$ 50
HDMM10	3048 $\pm$ 70
HDMM12	3660 $\pm$ 70
HDMM15	4570 $\pm$ 100
HDMM50CM	500 $\pm$ 30
HDMM1M	1000 $\pm$ 30
HDMM2M	2000 $\pm$ 50
HDMM3M	3000 $\pm$ 70
HDMM5M	5000 $\pm$ 100
HDMM30CM	300 $\pm$ 15
HDMM150CM	1500 $\pm$ 50

THIRD ANGLE PROJECTION



GENERAL NOTES

DIMENSIONS ARE IN MM - DO NOT SCALE

THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS PROPERTY OF STARTECH.COM

StarTech.com

PRODUCT ID	HDMMxx		
DESCRIPTION	High Speed HDMI 1.4 Cable with Ethernet - UHD 4K 30Hz Video		
DO NOT SCALE	SHEET: 1 OF: 1	UPLOAD DATE: 1/31/2023	

③	MOLDED Color: Black PVC	/
②	HDMI A MALE 19 PIN CONNECTOR. (GOLD PLATED CONTACTS, GOLD PLATED SHELL.)	2SET
①	HDMI CABLE: [(28AWG*2C+EAM)*4P+(30AWG*2C+EAM)+(30AWG*4C)]+AB, OD:7.3mm Copper Braid:65% Jacket Color: Black PVC	/
ITEM	MATERIALS LIST & SPEC. DESCRIPTION	Q'TY